




HDB 15 Male
Plastic: Blue



P1

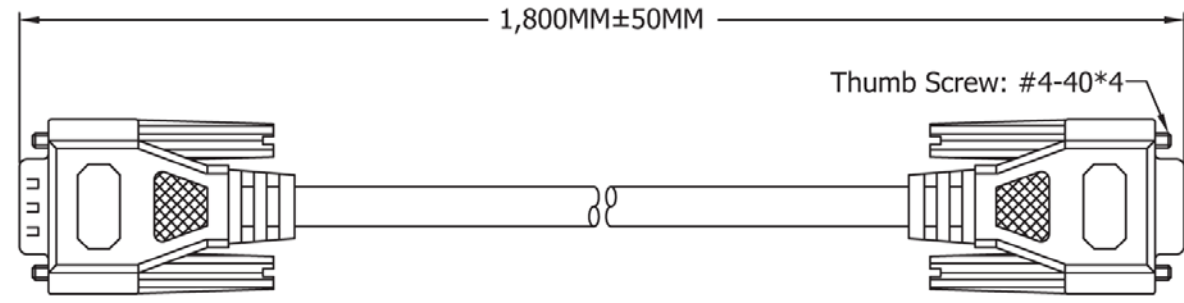

HDB 15 Female
Plastic: Blue




P2

Material:

1. CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL
INNER JACKET:PVC OD: 2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)
*7C+INSULATION:SR-PVC ID: 0.9± 0.05mm(UL-1061)+AL/MYLAR+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE, OD: 8.5± 0.15mm UL-2919 APPROVED
- 2.CONNECTOR:
P1:HDB 15P MALE,THE 9TH PIN IS EMPTY,GOLD FLASH CONTACT,
NICKEL PLATED SHELL
P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
- 4.SHIELD:P1 & P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- 5.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 6.ELECTRICAL TEST:
<1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20M OHMS MIN
- 7.PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN BLISTER)

PIN OUT

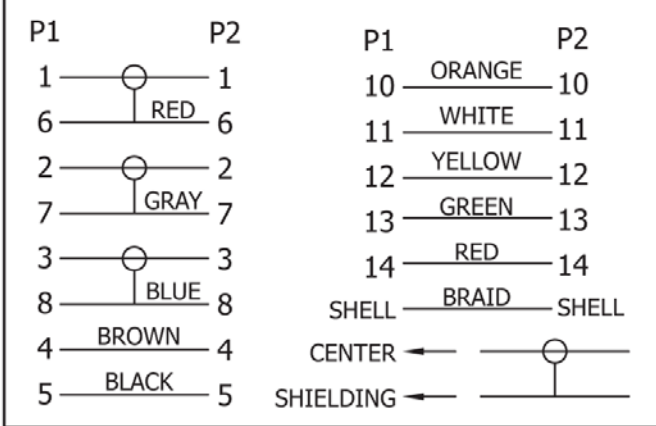

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.16.11	AK3220X
X.X	±0.40				Approved		
X.XX	±0.25						Title Premium XGA Monitor Extension Cable - HD D-Sub 15 pin Male <=> Female, 1.8 Meters
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet
		Modification	Date	Name			