$\frac{1}{4}$" x $\frac{7}{8}$" to 1 $\frac{1}{4}$" Universal In-Line Fuse Holders
HRK Series

RoHS
2002/95/EC

Dimensions – in (mm)

Drawing Not to Scale

2.19"
(55.6mm)

0.75"
(19.1mm)

0.69"
(17.5mm)

1.56"
(39.7mm)

0.38"
(9.5mm)
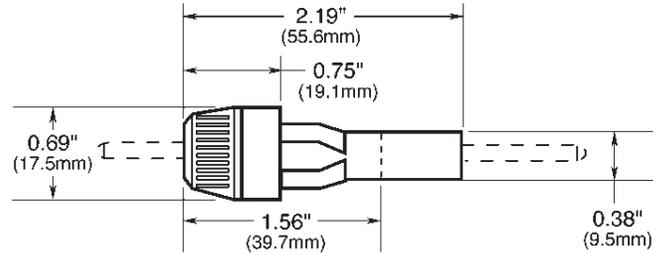
Description

- For $\frac{1}{4}$" diameter x $\frac{7}{8}$" to $\frac{1}{4}$" x 1 $\frac{1}{4}$" small dimension fuses
- #14 AWG copper wire leads
- 8" (203mm) leads
- Three springs furnished to accept different fuse lengths
- Flammability rating: UL 94V0

Ordering

- Specify packaging, product, and option code

Specifications		
Product Code	Voltage Rating	Current Rating
HRK-R	32V	15A

Packaging Code	
Packaging Code Prefix	Description
Blank	10 fuse holders packed into a carton
BK	100 fuse holders packed into a carton

COILTRONICS®

COOPER Bussmann®

PowerStor®

COOPER Bussmann