


1 2 3 4 5 6 7

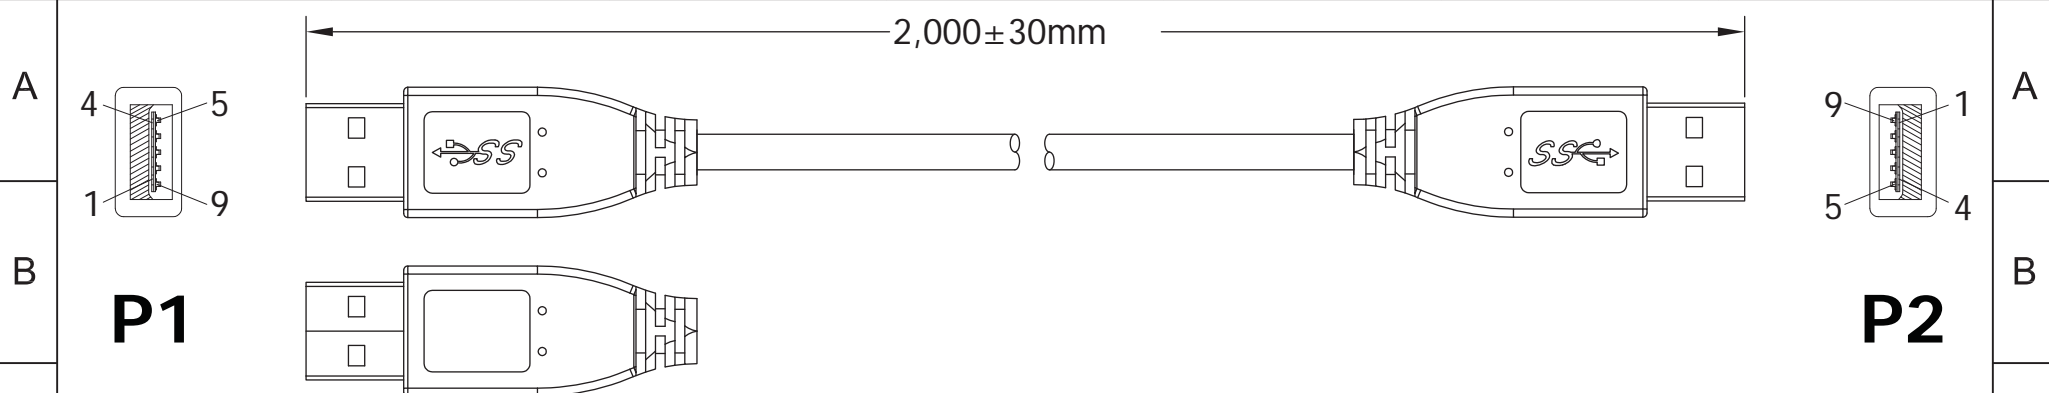

Material:

- Cable: UL-2725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7/0.127 T.C)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin + AL/MY +B.D(85%)

- PVC Jacket
- OD: 5.2±0.15MM
- Color: Black
- P1 & P2 Connectors: USB 3.0 A Male 9 Pin
 - Contact: 30μ"
 - Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

Electrical:

- 100% Open short & mis wire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 10MΩ Min.
- Hi-Pot 300V DC

PIN OUT		
P1	1 RED	P2
	2 WHITE	1 VCC
	3 GREEN	2 -DATA
	4 BLACK	3 +DATA
	5 BLUE	4 GND_PWRrt
	6 YELLOW	8 SDP1-
	7 D.W	9 SDP1+
	8 PURPLE	7 SDP1_Drain
	9 ORANGE	5 SDP2-
SHELL	B.D	6 SDP2+
		SHELL

G	Unit: mm	Scale	Free					Date	Name	Title USB 3.0 cable A type Male to Male, 9 pin, 2 Meters	
		TOLERANCE						Drawn	24.09.13		Wilson
H	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> RoHS Compliant </div>	X.	±0.3					Approved	24.09.13	Groll	ASSMANN WSW-No. AK670/3-2
		X.X	±X								
		X.XX	±X								rev00
		DIM	TOL								Sheet
		X.°	±X°								1/1
		X.X°	±X°								
		Angle	TOL	Id.	Modification	Date	Name				



1 2 3 4 5 6 7