



TECHNICAL SPECIFICATIONS
 Material: Zinc
 Plating: Nickel
 Operating Temperature: -25°C to +90°C
 Thumbscrews: UNC 4-40
 No. of contacts: 09-15-25-37

Item	QTY	Part description
1	1	Upper Cover
2	1	Lower Cover
3	3	CSK M2.5x11.5 Screw
4	1	Grommet Set
5	1	Jackscrew UNC4-40x28.5
6	1	Jackscrew UNC4-40x19.5



RoHS compliant
 Unit: mm

Scale	Free				Date	Name	Customer-No.	
TOLERANCE					Drawn	17.08.2017	S.Bölling	
0~6	±0.10				Approved	17.08.2017	S.Bölling	
6~30	±0.20							
30~120	±0.30							
120~400	±0.50							
DIM	Tol							
Angle	±1°	©	Drawn	17.08.2017				S.Bölling
Angle	Tol	Id.	Modification	Date				Name

Customer-No.		
ASSMANN WSW-No.		ACOVSUB-09MB39
Drawing-No.	ASS_5280_CO	rev00
Replace		Sheet 1/4

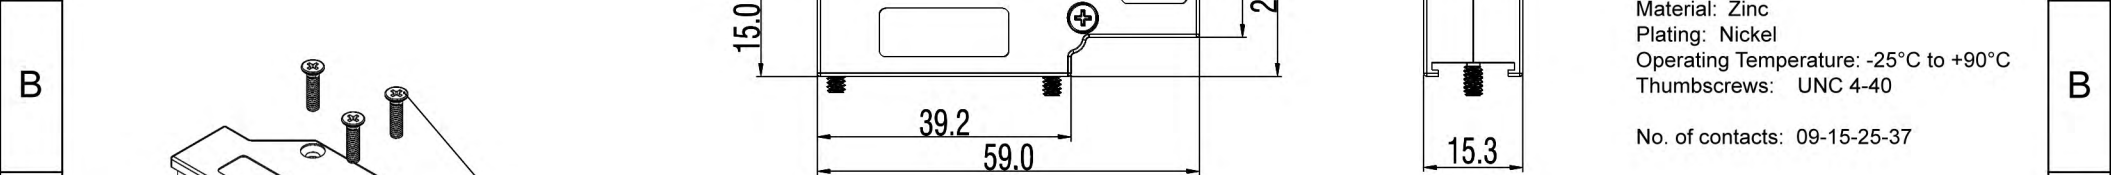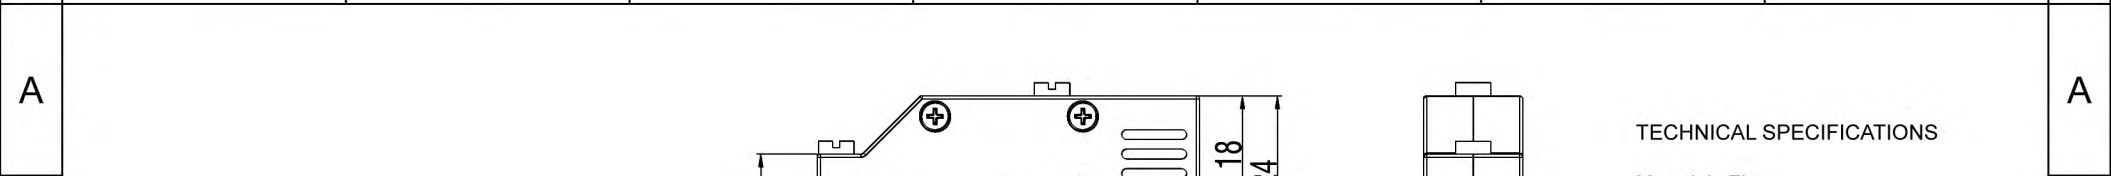


TECHNICAL SPECIFICATIONS
 Material: Zinc
 Plating: Nickel
 Operating Temperature: -25°C to +90°C
 Thumbscrews: UNC 4-40
 No. of contacts: 09-15-25-37

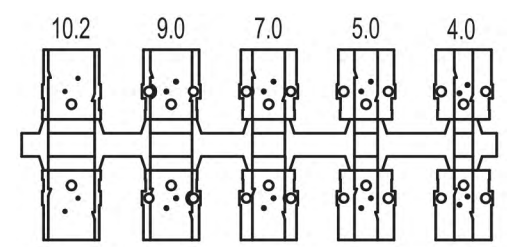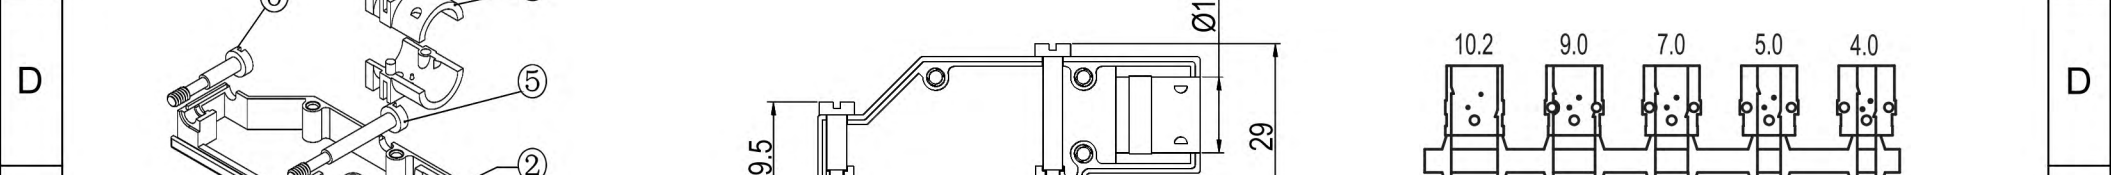




Grommet Set

Item	QTY	Part description
1	1	Upper Cover
2	1	Lower Cover
3	3	CSK M2.5x11.5 Screw
4	1	Grommet Set
5	1	Jackscrew UNC4-40x28.5
6	1	Jackscrew UNC4-40x19.5

G	RoHS compliant Unit: mm		Scale	Free				Date	Name	Customer-No.
			TOLERANCE					Drawn	17.08.2017	S.Bölling
			0~6	±0.10				Approved	17.08.2017	S.Bölling
			6~30	±0.20						
H			30~120	±0.30						ASSMANN WSW-No. ACOV-SUB-15MB39
			120~400	±0.50						Drawing-No. ASS_5280_CO
			DIM	Tol	© Drawn	17.08.2017	S.Bölling	ASSMANN WSW components		rev00
			Angle	±1°						Replace
		Angle	Tol	Id.	Modification	Date	Name			

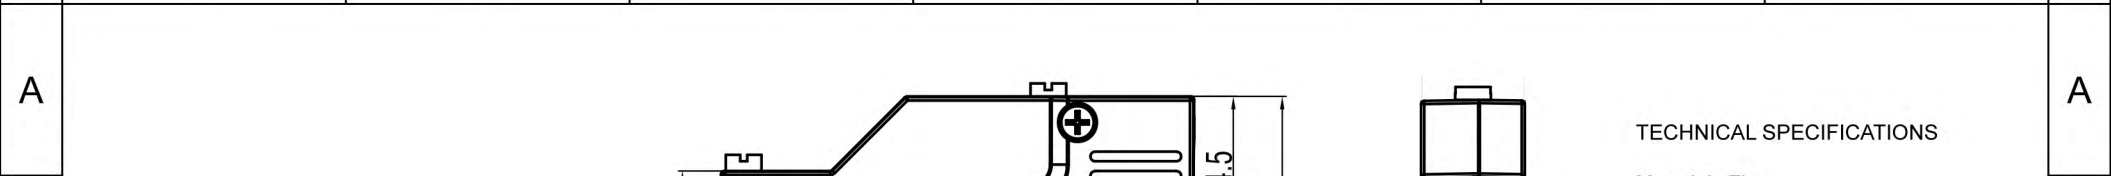

TECHNICAL SPECIFICATIONS
 Material: Zinc
 Plating: Nickel
 Operating Temperature: -25°C to +90°C
 Thumbscrews: UNC 4-40
 No. of contacts: 09-15-25-37

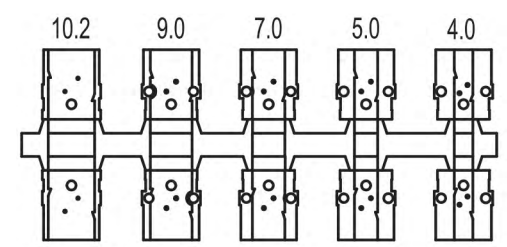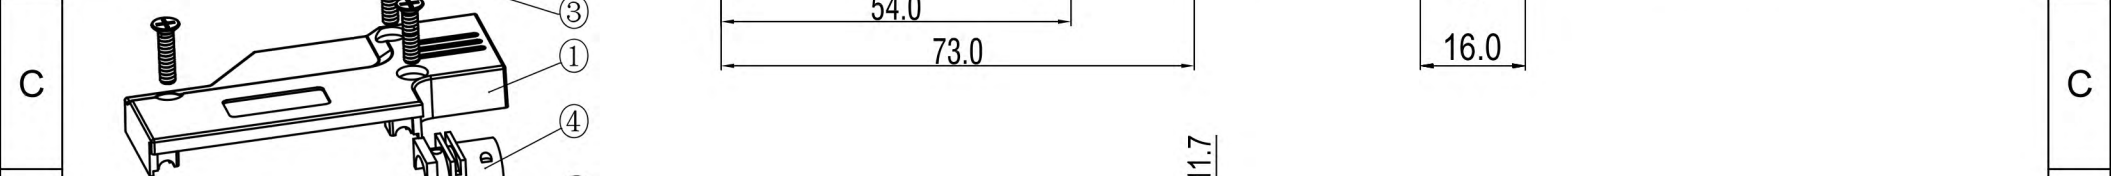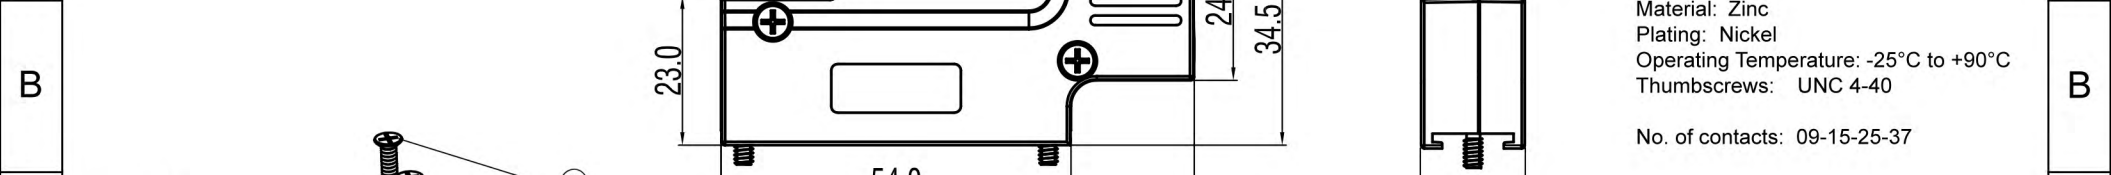

Grommet Set

Item	QTY	Part description
1	1	Upper Cover
2	1	Lower Cover
3	3	CSK M3x12 Screw
4	1	Grommet Set
5	1	Jackscrew UNC4-40x39.5
6	1	Jackscrew UNC4-40x28.5

RoHS compliant
 Unit: mm

Scale	Free				Date	Name	Customer-No.	
TOLERANCE					Drawn	17.08.2017	S.Bölling	
0~6	±0.10				Approved	17.08.2017	S.Bölling	
6~30	±0.20							
30~120	±0.30							
120~400	±0.50							
DIM	Tol							
Angle	±1°	©	Drawn	17.08.2017				S.Bölling
Angle	Tol	Id.	Modification	Date				Name

Customer-No.		
ASSMANN WSW-No.		ACOVSUB-25MB39
Drawing-No.	ASS_5280_CO	rev00
Replace		Sheet 3/4

