
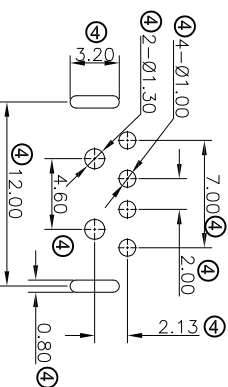
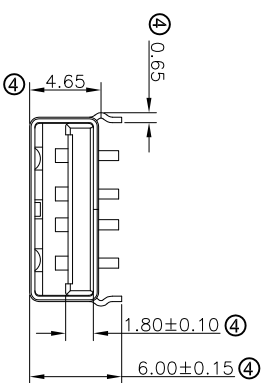


USB 2.0 COMPLIANT

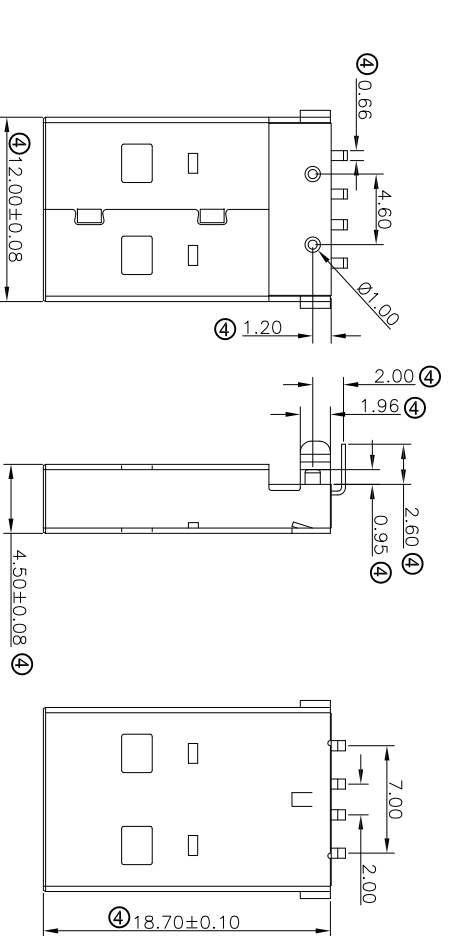

RECOMMENDED P.C.B. LAYOUT
(TOLERANCE:±0.05)

- ④ NOTES:
1. MATERIAL:
 - 1.1 Housing: PA9T UL94V-0, Color Black
 - 1.2 Contact : Brass
 - 1.3 Shell: Steel
 2. FINISH:
 - 2.1 Contact: Contact Area: Selective Gold Flash
Solder Area: Tin Plated
Under Plate: Ni Plated
 - 2.2 Shell: Ni Plated
 3. MECHANICAL:
 - 3.1 Mating Force: 3.57 kgf MAX
 - 3.2 Unmating Force: 1.02 kgf MIN
 - 3.3 Durability: 1500 Cycles MIN
 4. ELECTRICAL:
 - 4.1 Current Rating: 1.5A
 - 4.2 Dielectric Strength: 500V AC For 1 Minute
 - 4.3 Contact Resistance: 30mΩ MAX
 - 4.4 Insulation Resistance: 1000MΩ MIN
 5. OPERATING TEMPERATURE: -55°C To +85°C.
PACKING:Tray

RoHS compliant
Unit: mm

Scale	Free										
TOLERANCE											
X	±0.30	④	Update	24.05.2018	Segal	Drawn	11.02.2004	Hellwig	ASSMANN	Customer-No.	
.XX	±0.20	④	Update	24.05.2018	Winnie	Approved	24.05.2018		WSW components	ASSMANN WSW-No.	
.XXX	±0.10	③	Add "USB 2.0 COMPLIANT"	19.08.2013	Amy					A-USB A-LP-C	
DIM	TOL	②	Update	07.07.2009	Dean					Drawing-No.	
X.°	±5°	①	Drawn	11.02.2004	Hellwig					ASS 1413 CO	rev04
X.°	±3°									Replace	SHEET
Angle	TOL	Id.	Modification	Date	Name						

1	2	3	4	5	6	7
---	---	---	---	---	---	---

A	B	C	D	E	F	G	H
---	---	---	---	---	---	---	---