
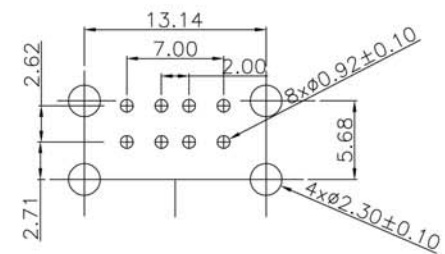
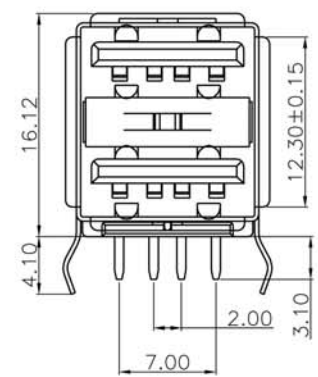
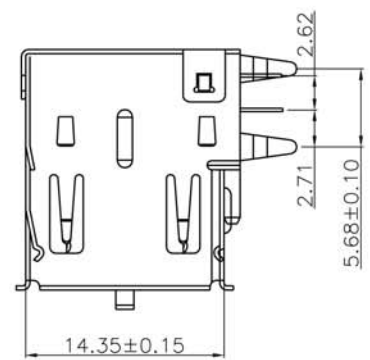


REV	ECN.NO:	B Y	DATE
.	.....	..	.....



RECOMMENDED P.C.B. PATTERN LAYOUT

MATERIAL  
 INSULATOR:PBT+30%G.F  
 COLOR:BLACK/WHITE/BROWN/BEIGE-----  
 CONTACT:BRASS  
 SHELL:BRASS  
 MECHANICAL  
 MATING:35N MAX.  
 WITHDRAWAL FORCE:10N MIN.  
 DURAL LITY:1500 CYCLES MIN.  
 ELECTRICAL  
 CURENT-MAX[AMPS]:1.0A  
 VOLTAGE-MAX[VOLTS]:30V  
 WITHSTANDING VOLTAGE:100V AC.  
 CONTACT RESISTANCE [OHMS]:50mΩ MAX.  
 INSULATION RESISTANCE [OHMS]:1000MΩ MIN.  
 PLATING  
 CONTACT: GOLD PLATING CORD: 5u"  
 SHELL:Nickel(Tin) OVER ALL PLATING  
 ENVIRONMENTAL  
 TEMPERATURE RANGE:-55°C to +85°C

RoHS  
Compliant

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		<b>ASSMANN</b> Electronics, Inc.	
		⊕    ▱	TITLE: USB, VERSION A, 2-PORT
X.X ±0.30	X.X" ±3"	APPD:	PRODUCT NO: AU-Y1008-R
X.XX ±0.15	X.XX" ±1"	CHECK:	DATE    SCALE    UNIT    TYPE    PAGE
X.XXX ±0.10	X.XXX" ±0.5"	DRAW:	FREE    MM