

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F





F

G

G

H

H

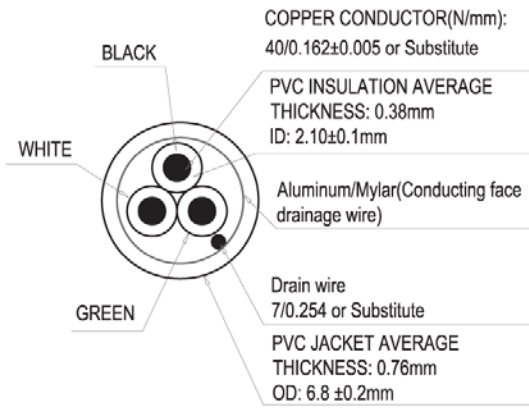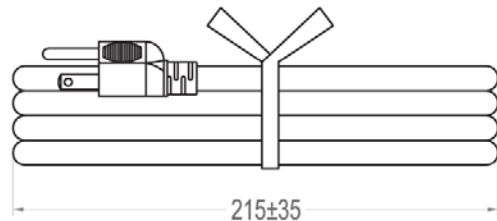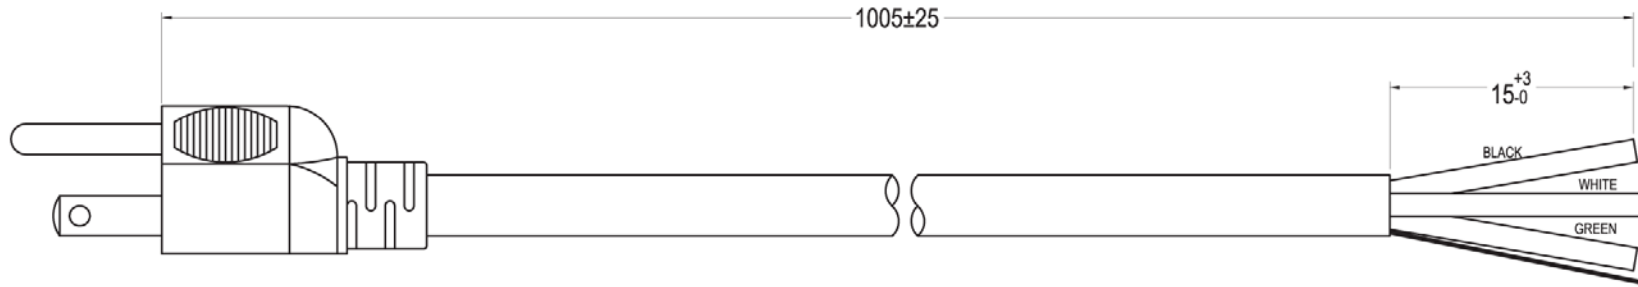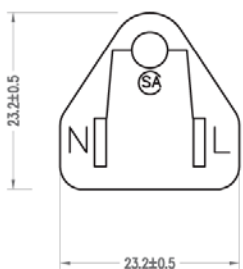

Material:

- SVT 3x18AWG(0.824MM<sup>2</sup>) VW-1 Shielded, 105° 300V
- Jacket Color: Black
- E- Green; L- Black; N- White

Electrical Test :

- 100% Open & Short Testing
- Insulation Resistance : 100meg-ohm(Min.)
- Voltage : 500V DC / 1 Min.

Unit: mm



Scale	Free						Date	Name	Title
TOLERANCE						Drawn	27.12.11	Chappell	Power cord - Plug ⇄ Open End SVT, 18AWG, 105°C, Shielded, 1 meter
X.	±X					Approved	21.06.13	Groll	ASSMANN WSW-No.
X.X	±X								AK500-OE-7-1
X.XX	±X								Drawing-No.
DIM	TOL								
X.°	±X°	①	Updated all information	21.06.13	Wilson				rev01
X.X°	±X°							Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name	<small>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</small>			1/1

1

2

3

4

5

6

7