


Ground lug
 6/32 x 1/4L Screw
 0.31" square surface
 Brass, Nickel plate

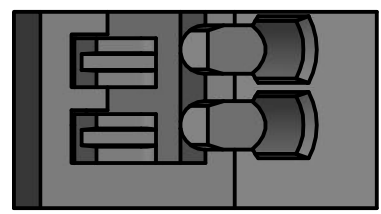

Conductor cross section solid min. 0.14 mm²
 Conductor cross section solid max. 0.5 mm²
 Stripping length 9 mm
 Conductor cross section AWG min. 24
 Conductor cross section AWG max. 20

DRAWN Juan Lizarazo	5/30/2015			
CHECKED		TITLE		
QA		IsoBlock C		
MFG		SIZE	DWG NO	REV
APPROVED		C	IsoBlock C-4c	
		SCALE	SHEET 1 OF 1	