


DWG NO 608695

UNIT OF MEASURE	A	B	C	D	E	G	L	MAX BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.788	.348	.187	.239	.055	.212	16.06	4.0	50 lbs.
MM	20.02	8.84	4.75	6.07	1.40	5.38	408.	101.6	22.68 kg.

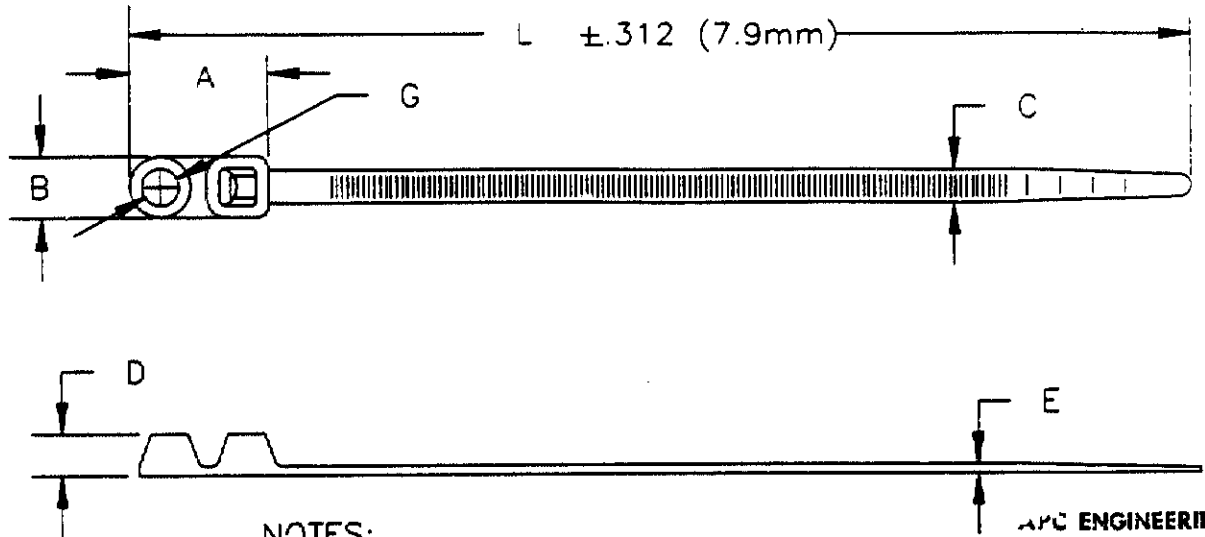

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING
JUL 13 1990
ISSUED BY *Chen*

CUSTOMER DRAWING UNPUBLISHED

3
OBSOLETE

1-608695-9	NATURAL-100 PCS. SMTY4C
2-608695-9	NATURAL-1000 PCS. SMTY4M
1-608695-0	BLACK-100 PCS. SMTY4CB
2-608695-0	BLACK-1000 PCS. SMTY4MB

LOC D	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
DIST 1	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)			
QTY. REQ'D. PER ASSY.		PARTS LIST		
	MATERIAL	HEAT TREAT	FINISH	
	NYLON 6/6			
	DIMENSIONS ARE IN INCHES	DRAWN BY:	DATE:	APPROVED BY:
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	AD-TEK/VL	7/3/90	
	2 PL DEC ±	CHECK BY:	RELEASE:	
	3 PL DEC ± .030	BJM 7/90	J Hamed 7/5/90	
	4 PL DEC ±	AMP AMP INCORPORATED Harrisburg, Pa..		
	ANGLES ±	NAME: # 10 SCREW MOUNT CABLE TIE 16 INCH		
	SURF TEXTURE: J	REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.		
O1	REVISED PER ECO-09-026444	KK	28NOV 09	
✓ 0	ECN 062890	Jmy	7/90	
P	F	LTR	REVISION RECORD	APP DATE
SCALE: A		DRAWING No.: 608695		SHEET: 1 OF 1
				REV: 01