

Specifications:


NO CIRCUITRY

| | |
|---|-----------------------------------|
| Oscillation Frequency (Hz) | 2731 |
| Operating Voltage (Vp-p/max) | 2.0 ~ 4.0 |
| Rated Voltage (Vp-p) | 3.0 |
| Current Consumption Max. (mA) | 80 at Rated Voltage |
| Sound Pressure Level Min. (dB/min) | 85 at 10cm at Rated Voltage |
| Coil Resistance (Ω) | 15 \pm 2 |
| Operating Temperature ($^{\circ}$ C) | -20 ~ +85 |
| Storage Temperature ($^{\circ}$ C) | -30 ~ +90 |
| Housing | LCP plastic resin (Color : Black) |
| Type of Connection | SMD |
| Condition by reflow soldering ($^{\circ}$ C) | 250 \pm 5 / within 5 sec |
| Condition by hand soldering ($^{\circ}$ C) | 350 \pm 20 / within 5 sec |
| Weight (g) | 0.4 |
| Options | For other options contact factory |

Dimensions: (units: mm)

PS: Vp-p = 1/2duty, square wave

RoHS Compliant

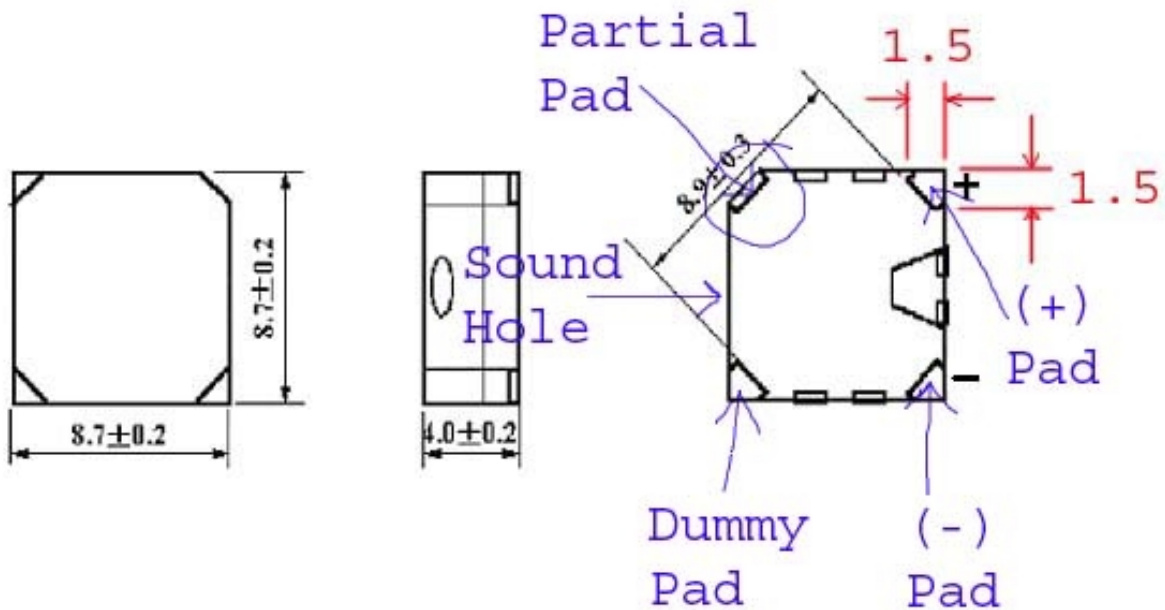

* Dummy pad and Partial Pad are connected internally and are intended to only be used to help secure the part to the circuit board.

Packaging:

Parts are supplied in tubes of 35 pieces.

Units come with wash label and are appropriate for aqueous wash.