

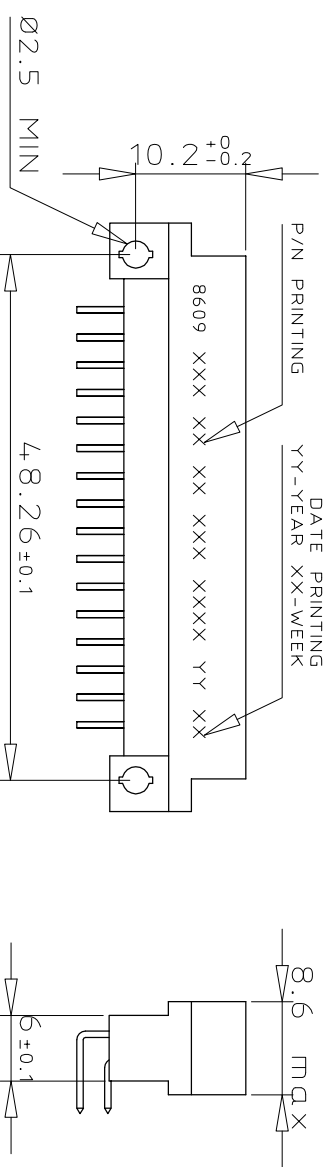



DIMENSIONS

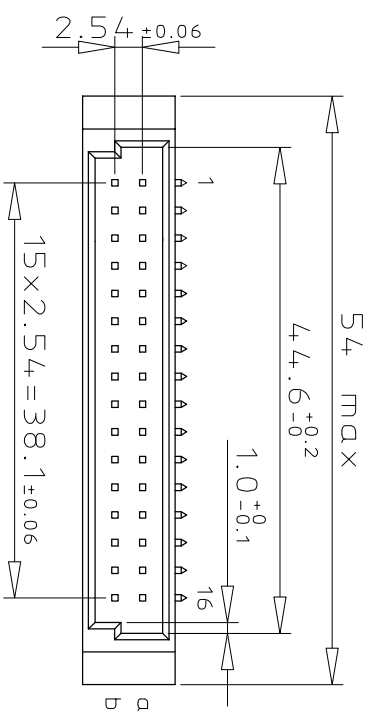

PCB LAYOUT

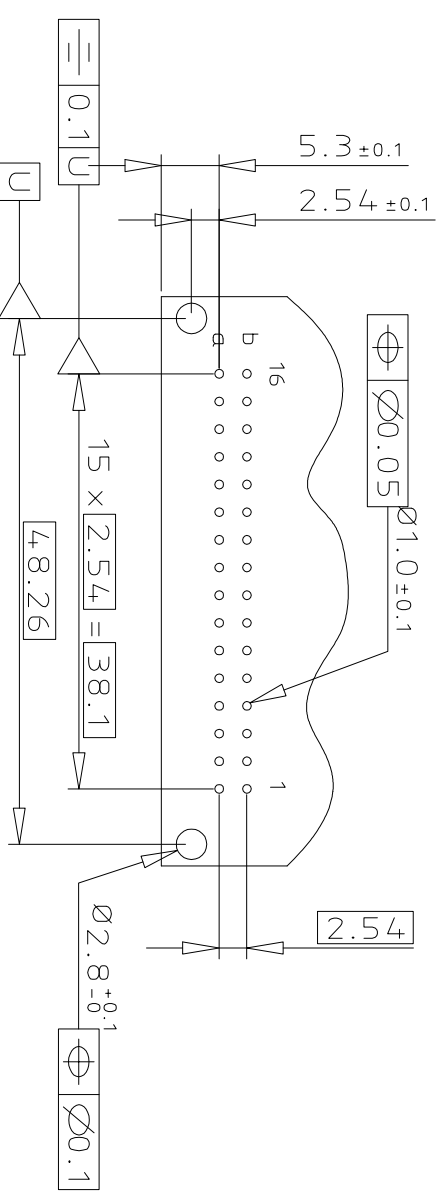

TERMINATION

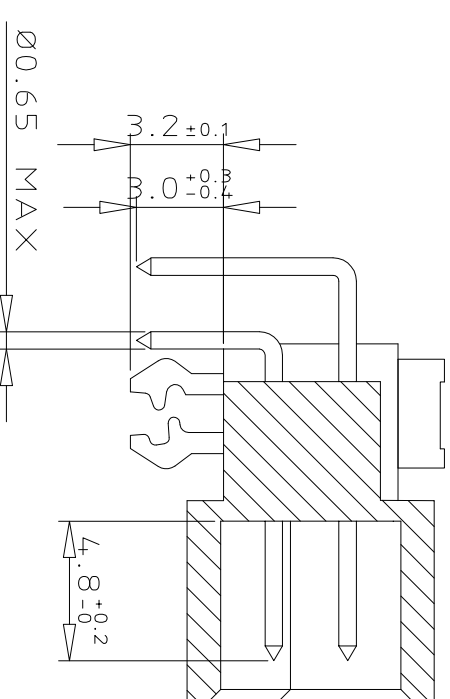

ORDERING INFORMATION

SERIES	8609	2	32	5	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	b	-	-	-	-	-	-	2	32
NO. OF CONTACTS	NO. OPTION WITH HARPOONS	TYPE OF INSULATOR	2 ROW MALE INSULATOR	METHOD OF MOUNTING	STANDARD MOUNTING - STYLE B/2	TERMINATION	ANGLED SPILL	OPTIONS	NO. OPTION WITH HARPOONS	PERFORMANCE CLASS
DIN 41612 CLASS 3	DIN 41612 CLASS 2	DIN 41612 CLASS 1	AS PER MIL C 55302 / JSS 50808	PITCH PER ROW	2.54 mm	LEAD FREE VERSION	ELF			

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302	tolerance	ISO 406 ISO 1101	projection	mm	product family	8609
tr	ecn	no	dr	dtte	angles	linear	0.XX ±0.1	title	DIN STANDARD HEADER
A	104-0063	MINI	2004-09-17		0.XX ±0.1		0.1	ANGLED SPILL	DIN 41612 STYLE B/2
B	105-0089	MINI	2005-05-19		0.XX ±0.1		0.1		
C	106-0061	MINI	2006-05-31	0*2*	0.XXX ±0.1		0.1		
D	107-0155	KR	2007-11-14	dr	MINI K V		0.1		
E	108-0146	KR	2008-10-21	engr	RAKHEE G		0.1		
		chr	KESAVAN R		2008-10-21		0.1		
		pppd	KESAVAN R		2008-10-21		0.1		
sheet index	revision	sheet	1					type	Product Customer Drawing