



SECTION A-A  
(VIEW FROM FRONT)

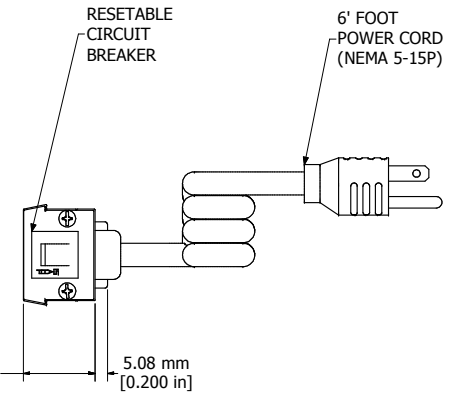

ASSEMBLY - VIEW FROM END

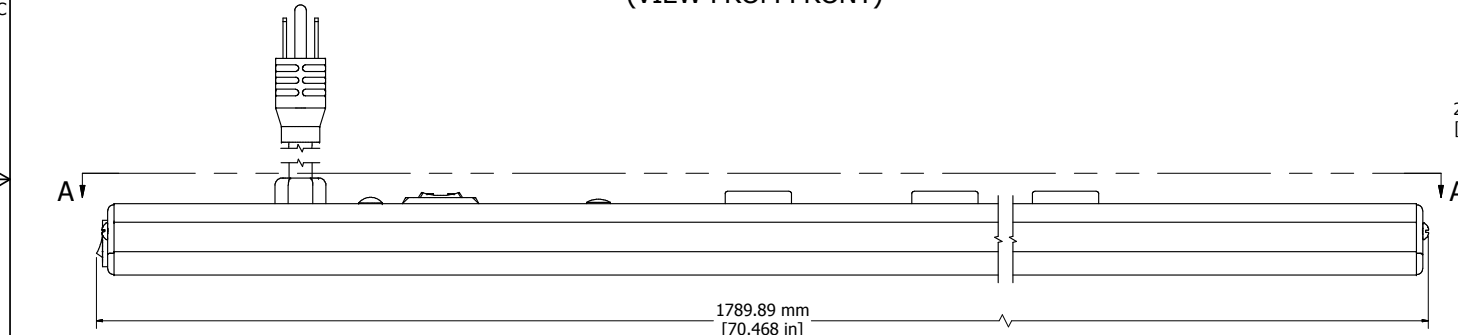

ASSEMBLY - VIEW FROM SIDE



ISOMETRIC VIEW

|  |
|--|
| <b>1587H19**S</b>  |
| Finish - Case - Anodized Aluminum Extrusion                  |
| Ends - ABS Plastic   |
| Rated - 125 VAC, 60 Hz, 15 Amps                              |
| Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99) |
| CSA No. 8-M1986  |
| Surge Specs - 780 Joules, 54000 Amps Transient Current       |
| - Protection in 3 AC Modes (L-N, N-G, L-G)                   |
| <b>Cord Length &amp; Colour</b>                              |
| 1587H19A1S - 6' Foot Power Cord (NEMA 5-15P)                 |
| 1587H19B1S - 15' Foot Power Cord (NEMA 5-15P)                |
| <b>Accessories Included</b>                                  |
| Mounting Bracket Kit with Hardware                           |

**HAMMOND MANUFACTURING™**

**1587H19\*\*S**

www.hammondmfg.com