




1	2	3	4	5	6	7
---	---	---	---	---	---	---

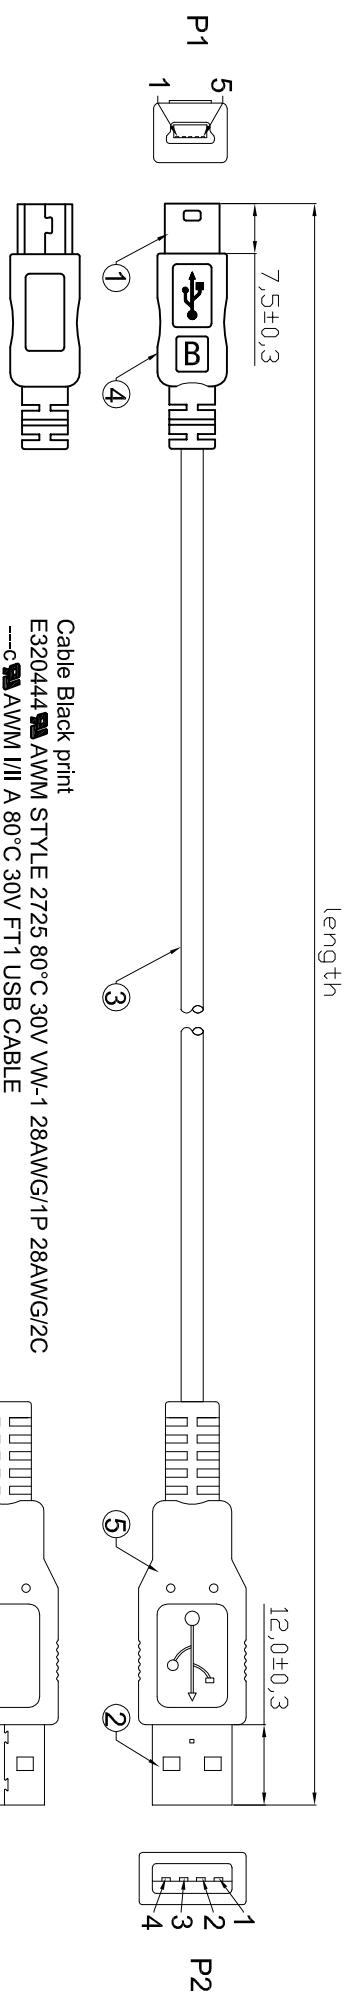

Cable Black print
 E320444 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C
 ---c AWM I/II A 80°C 30V FT1 USB CABLE

WSW P/N	Jacket color	Length(mm)
AK672M/2-1-GR	Grey	1000±30
AK672M/2-2-GR	Grey	2000±50
AK672M/2-3-GR	Grey	3000±50
AK672M/2-5-GR	Grey	5000±50

- Electrical test:
1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

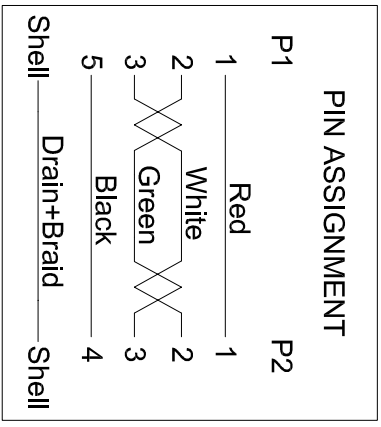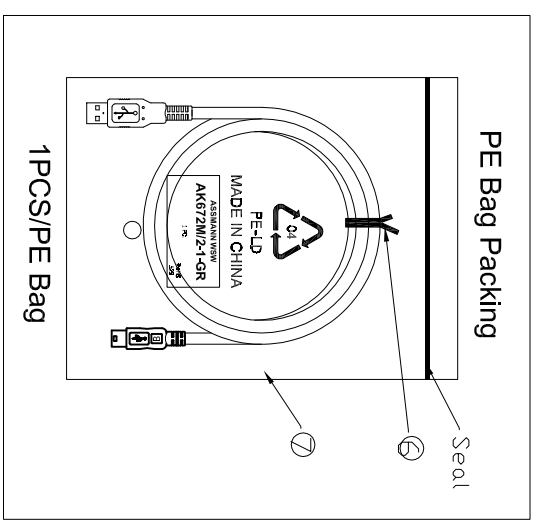

NO.	NAME	QTY	SPECIFICATION
①	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
②	TIE	2	Black
③	Out Jacket	6g	Grey(A-112#) PVC-50P
④	Out Jacket	6g	Grey(A-112#) PVC-50P
⑤	Cable	1	Grey(A-112#) USB2.0 UL2725 28#/1P+28#/2C+AEB OD:3.8mm
⑥	CONN	1	USB 2.0 A MALE SHELL:Nickel PIN:G/F Insulator color: White
⑦	CONN	1	USB 2.0 MINI 5P MALE SHELL:Nickel PIN:G/F Insulator color: Black

RoHS compliant
 Unit: mm

Scale	FREE
TOLERANCE	
DIM	TOL
Angle	TOL

Update the drawing	Date	Name
①	26.01.2016	Amy
②	09.05.2014	Amy

Customer-No.	ASSMANN WSW-No.	Drawing-No.	Replace
	AK672M/2-X-GR	ASS 7132 CA	rev01

1	2	3	4	5	6	7
---	---	---	---	---	---	---



ASS 7132 CA

AK672M/2-X-GR

rev01

Sheet