


N=Number of contacts

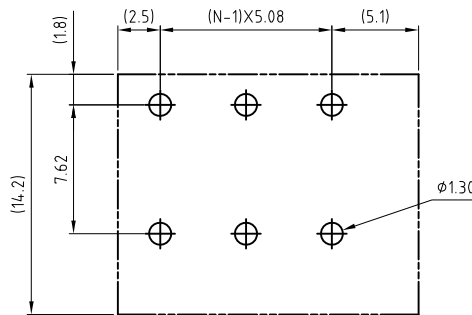

P.C.B. LAYOUT

Material

Terminal body(Contact pin):Brass
 Wire guard: Stainless steel
 Surface of solder tail: Tin plated
 Insulator(housing): Thermoplastic (UL94V-0) ,
 GREEN(RAL6018/T)

Electrical cULus/VDE

Voltage rating: 300VAC/250VAC
 Current rating: 10A/10A
 Wire range:0.75-1.5mm²
 Solid wire(AWG): 14-24
 Stranded wire(AWG): 14-24
 Wire strip length: 9-10mm
 Withstanding Voltage: 1.6KV/2KV
 Operating temperature: -40°C to +115°C
 Soldering temperature: 250°C±10°C/5 Sec
 Safety Approval:



Poles	Tolerance	
	DIM L	DIM P
2p-6p	±0.20	±0.20
7p-12p	±0.25	±0.25
13p-24p	±0.40	±0.40

RoHS compliant
Unit: mm

Scale	Free					Date	Name	
TOLERANCE						Drawn	10.12.2009	Dean
X.	±0.50					Approved	17.04.2013	Amy
X.X	±0.30							
X.XX	±0.10							
DIM	TOL	②	Update	17.04.2013	Amy			
X.°	±1°	①	Drawn	10.12.2009	Dean			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.

ASSMANN WSW-No.
A-TB508-HAxxH

Drawing-No.
ASS 3894 CO rev02

Replace Sheet