

## Reducing adapter - REDUC-K-KV-M32/M25 BK - 1410712

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Reducing adapter, plastic, M32 to M25, including O-ring



### Key Commercial Data

Packing unit	1 STK
Minimum order quantity	10 STK
Custom tariff number	39269097
Country of origin	Germany

### Technical data

#### Dimensions

Length	16 mm
Length without connecting thread	6 mm
Connecting thread diameter	32 mm
Length of the connecting thread	10 mm

#### Ambient conditions

Degree of protection	IP65 (Depends on the screw connection used)
Ambient temperature (operation)	-30 °C ... 100 °C

#### General

Material	Polyamide fiberglass reinforced
Seal material	CR
Outer thread	M32
Internal thread	M25
Flammability rating according to UL 94	HB

# Reducing adapter - REDUC-K-KV-M32/M25 BK - 1410712


## Technical data

### Standards and Regulations

Flammability rating according to UL 94	HB
--	----

## Drawings

Dimensional drawing

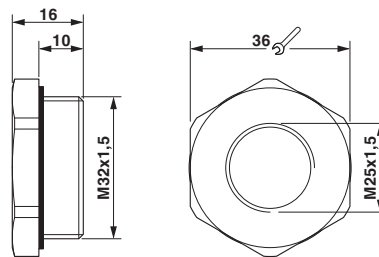

Dimensional drawing

## Classifications

eCl@ss

eCl@ss 4.0	27141209
eCl@ss 4.1	27141209
eCl@ss 5.0	27149109
eCl@ss 5.1	27149109
eCl@ss 6.0	27149109
eCl@ss 7.0	27149109
eCl@ss 8.0	27149109
eCl@ss 9.0	27144432

ETIM

ETIM 4.0	EC000441
ETIM 5.0	EC000441

UNSPSC

UNSPSC 6.01	30211808
UNSPSC 7.0901	39121408
UNSPSC 11	39121408
UNSPSC 12.01	39121408
UNSPSC 13.2	39121408

