

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G



H

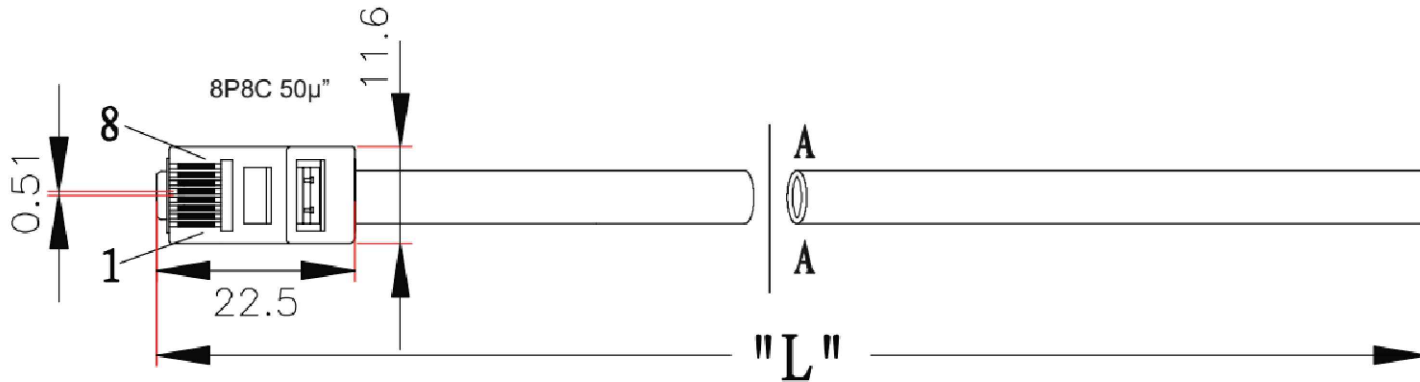

P1

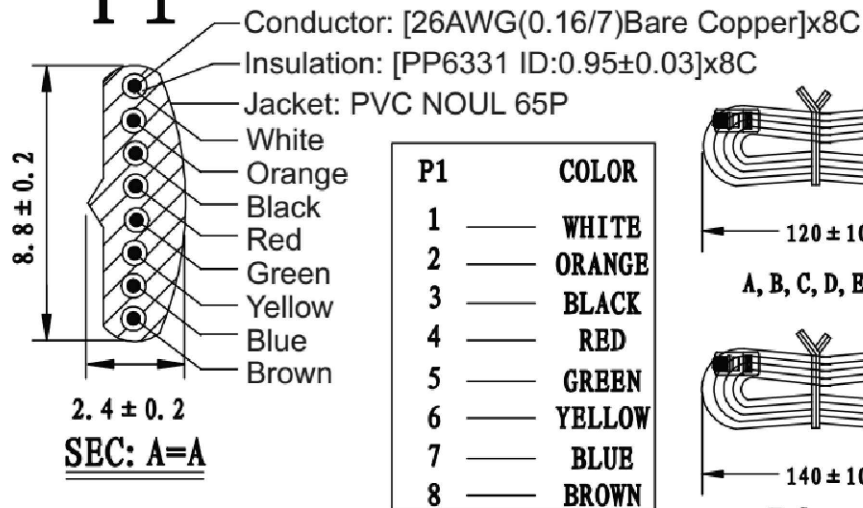

P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN



Note:

- Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate.

Part Number	wire length	cut length
AT-S-26-8/8/X-5-OE	1525±20(5ft)	1525-1535mm
AT-S-26-8/8/X-7-OE	2135±30(7ft)	2135-2145mm
AT-S-26-8/8/X-10-OE	3050±60(10ft)	3050-3060mm
AT-S-26-8/8/X-12-OE	3660±60(12ft)	3660-3670mm
AT-S-26-8/8/X-14-OE	4270±60(14ft)	4270-4280mm
AT-S-26-8/8/X-25-OE	7625±100(25ft)	7625-7635mm
AT-S-26-8/8/X-50-OE	15250±150(50ft)	15250-15260mm

AT-S-26-8/8/X-XX-OE

B:black,S:silver,W:white length in feet

RoHS compliant  
Unit: mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE				Drawn	09.05.2016	Joanna	ASSMANN WSW-No. <b>AT-S-26-8/8/X-XX-OE</b>
				Approved	09.05.2016	Joanna	
DIM	TOL						Drawing-No. <b>ASS 7658 CA</b>
		①	Drawn	09.05.2016	Joanna		rev00
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet



1

2

3

4

5

6

7