


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			DS	EL	
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E		REV PER ECO-12-012918	05JUL2012	JM	JG

- 1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2. MATERIAL: HOUSING- POLYCARBONATE BLUE. TERMINAL- PHOSPHOR BRONZE, PLATED WITH 1.27µm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, OVER 2.54µm [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE, 0.74-0.86 [.029-.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 6.61 [.090 X .260] MAXIMUM.
- 4. TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 6. 100 ASSEMBLIES PER PACKAGE.

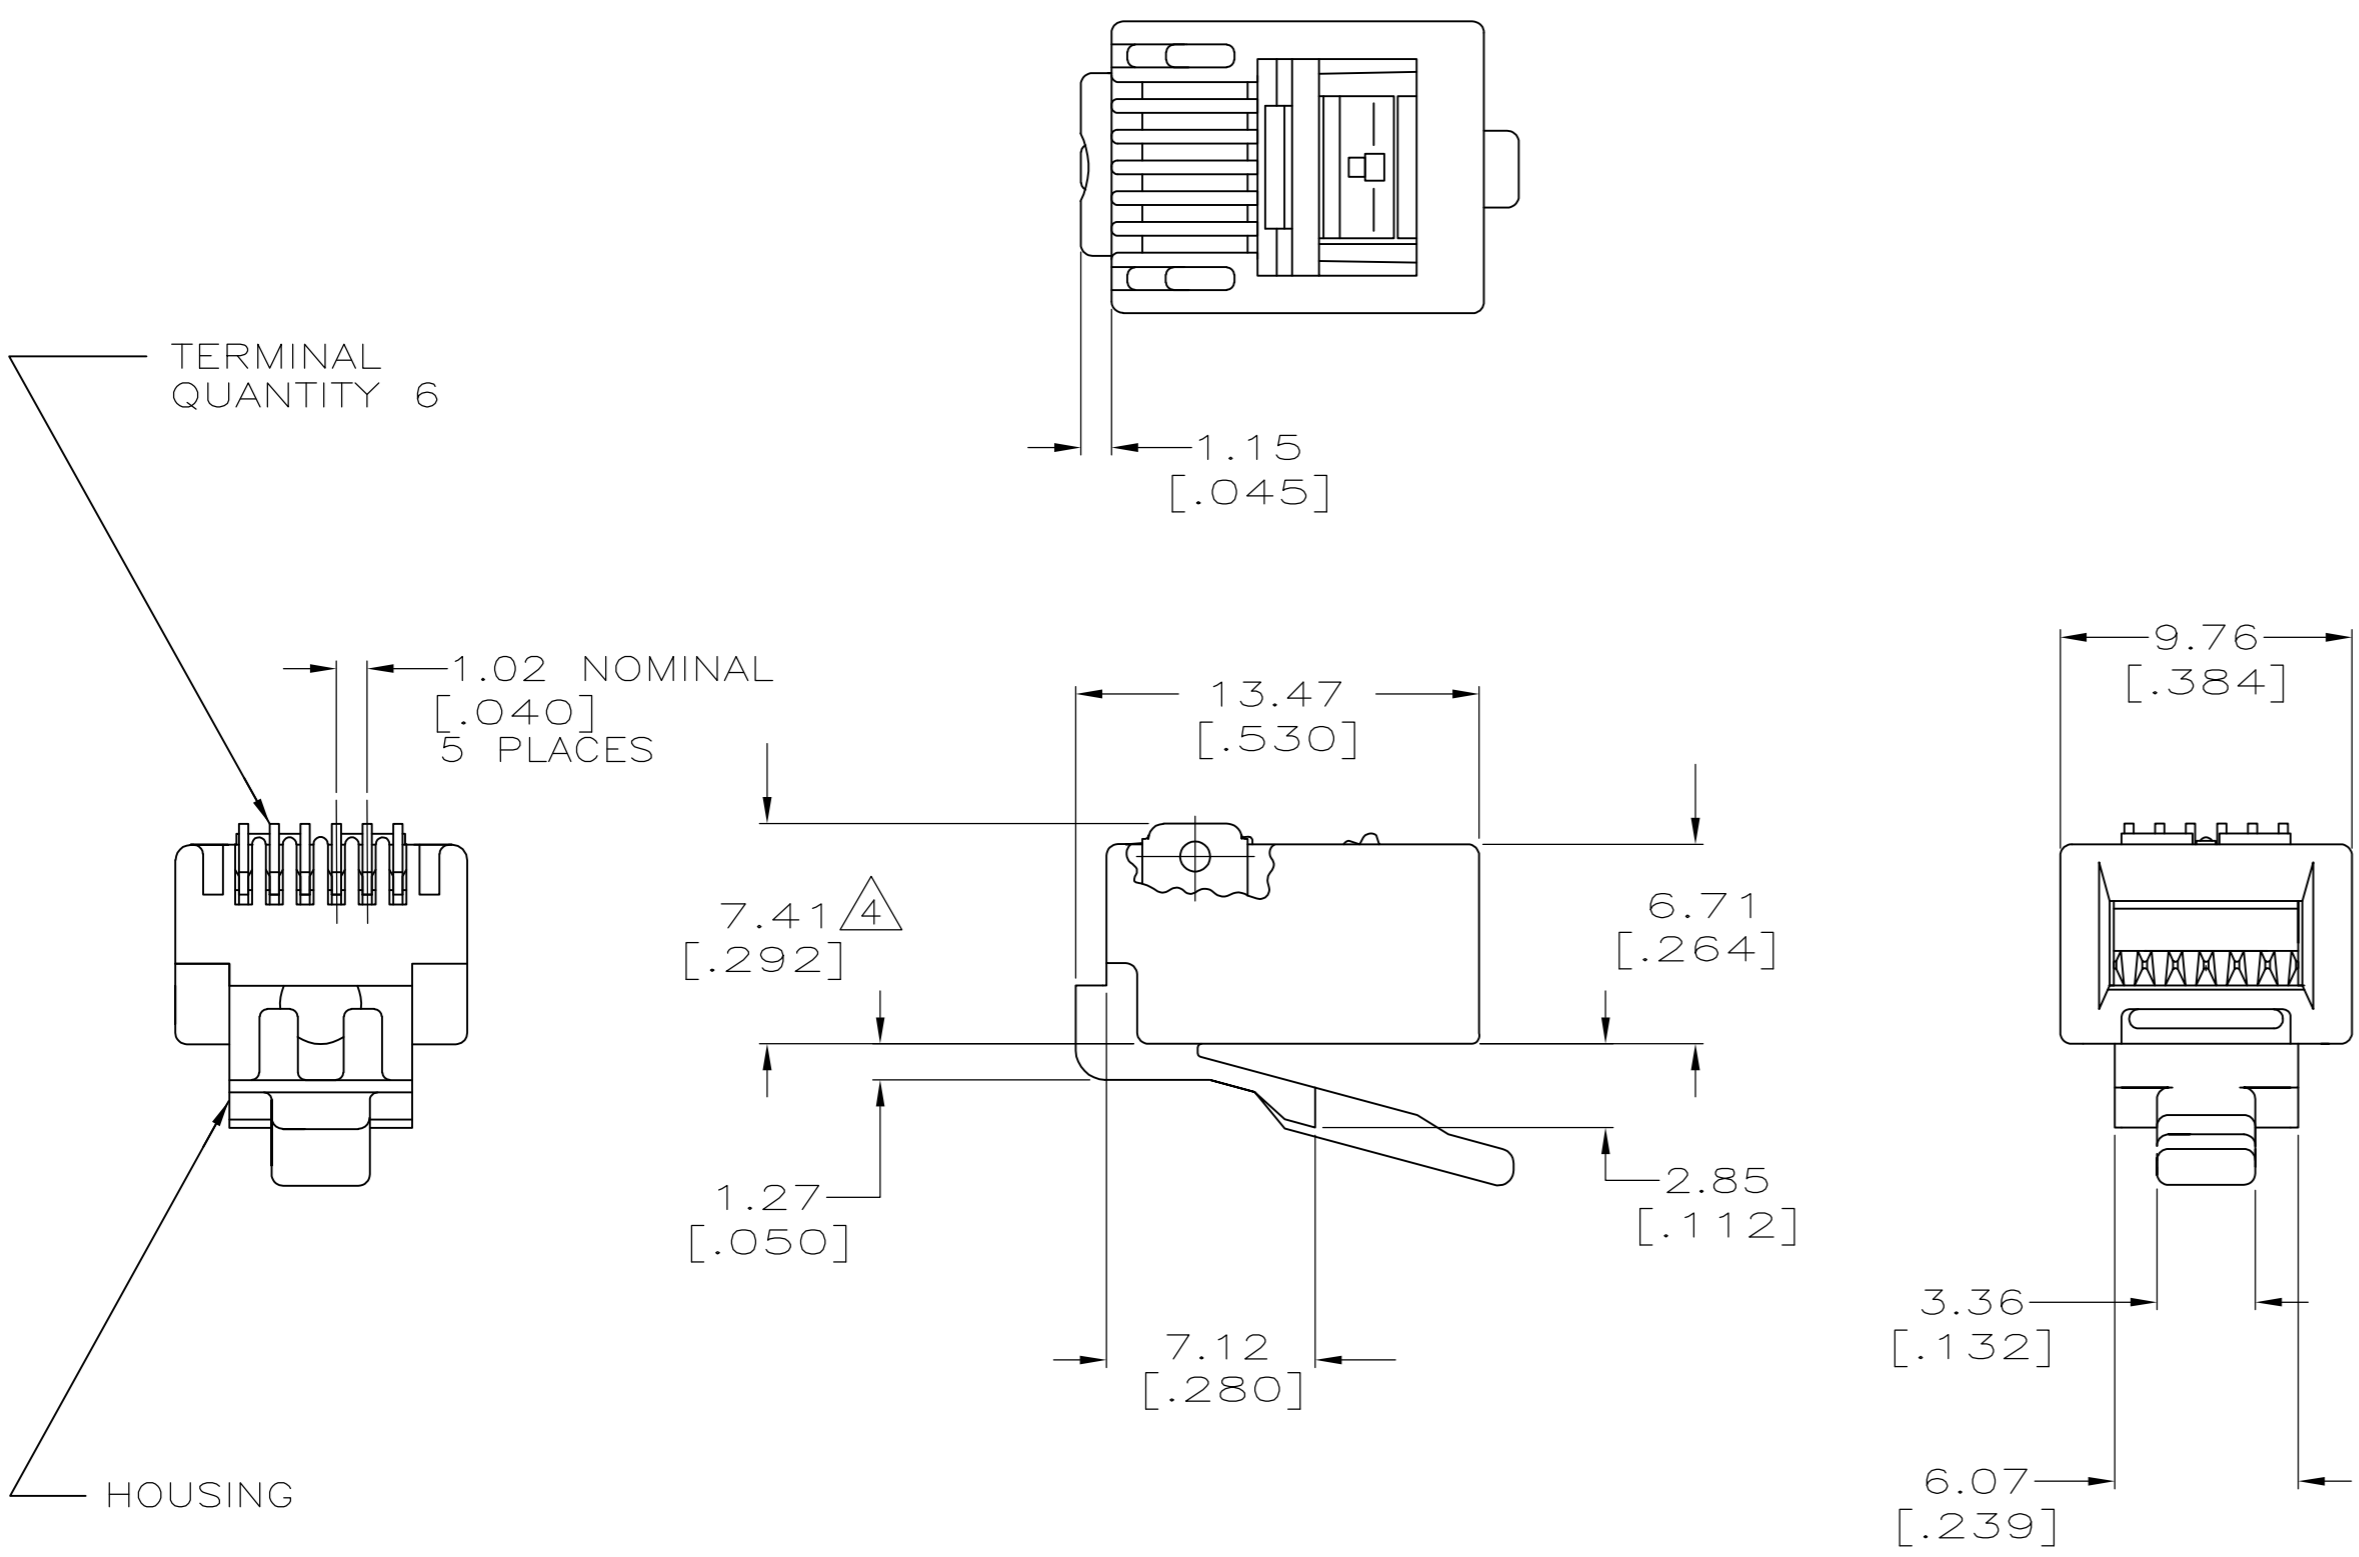

6	5-557971-3
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. SIMPSON 6-8-93	TE TE Connectivity	
		CHK C. WHITT 6-21-93		
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
0 PLC ± -		1 PLC ± -		PRODUCT SPEC
1 PLC ± -		2 PLC ± -		108-1163
2 PLC ± -		3 PLC ± -		APPLICATION SPEC
3 PLC ± -		4 PLC ± -		114-6016
4 PLC ± -		ANGLES ± -		SIZE
MATERIAL		FINISH		CAGE CODE
2		2		00779
				DRAWING NO
				C=557971
				RESTRICTED TO
				-
				SCALE
				4:1
				SHEET
				1 of 1
				REV
				E